


CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufting 1/10" cut pile COC Tufté 1/10" velours COC Getuftet 1/10" COC-Velours Getuft 1/10" velours COC	PERMANENTLY ANTISTATIC ANTISTATIQUE PERMANENT PERMANENT ANTISTATISCH PERMANENT ANTISTATISCH	ISO 6356 < 2 kV
PILE MATERIAL COMPOSITION DU VELOURS POLMATERIAL POOLMATERIAAL	100% PA 6 IMPREL®	IMPACT NOISE RATING ISOLATION PHONIQUE TRITTSCHALLVERBESSERUNG GELUIDSISOLATIE	ISO 140-8 22 dB ΔLw
PRIMARY BACKING SUPPORT TRÄGERMATERIAL TUFTDOEK	Woven PP PP tissé Bändchengewebe PP Geweven PP	SOUND ABSORPTION ABSORPTION PHONIQUE SCHALLABSORPTIONSGRAD GELUIDSABSORPTIE	ISO 354 0.15 αw
SECONDARY BACKING DOSSIER RÜCKEN TAPIJTRUG	Action Back	THERMAL RESISTANCE RÉSISTANCE THERMIQUE WÄRMEDURCHLASSWIDERSTAND WARMTEDOORLAATWEERSTAND	ISO 8302 0.09 m² K/W
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	Ca.420 gr/m²	FASTNESS TO LIGHT SOLIDITÉ A LA LUMIÈRE LICHTTECHTHEIT LICHTTECHTHEID	ISO 105-B02 ≥ 5-6
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	Ca. 1.480 gr/m²	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4-5
PILE HEIGHT EPAISSEUR DU VELOURS POLHÖHE POOLHOOGTE	Ca. 2 mm	FIRE RESISTANCE COMPOTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 Cfl-s1 (if glued)
TOTAL HEIGHT EPAISSEUR TOTAL GESAMTHÖHE TOTALE DIKTE	Ca. 4 mm	RUBBING FASTNESS SOLIDITÉ AU FROTTEMENT REIBECHTHEIT WRIJFECHTHEID	EN ISO 105-X12 ≥ 4
TUFT DENSITY NOMBRES DE POINTS NOPPENZAHL AANTAL PUNTEN	Ca. 216 000/m²	NUMBER OF COLOURS NOMBRES DE COULEURS ANZAHL FARBEN AANTAL KLEUREN	12
PILE DENSITY DENSITÉ DU VELOURS POLROHDICHTE POOLDICHTHEID	Ca. 0.105 g/cm³	WIDTH LARGEUR BREITE BREEDTE	EN ISO 3018 ca. 400 & 500 cm
CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 32 - LC1		
CASTOR CHAIR SUITABILITY CHAISE À ROULETTES STUHLROLLENEIGNUNG ROLSTOELGESCHIKTHEID	EN 985 A: intensive use		
STAIR SUITABILITY ESCALIERS TREPPENEIGNUNG TRAPPENGESCHIKTHEID	EN 1963 A: intensive use		

TUV NORD
Systems
TUV NORD Systems
Systeme & Co. KG
Accredited to DIN EN ISO 9001

Suitable for
Allergic Persons
Wall to wall carpet of
allergen-tested
material
3.2-2384/05

ÉMISSIONS DANS L'AIR INTÉRIEUR
A+
A B C

REG. NR
3B9A8F46
HONNÊTE - CARPETS TESTED
GUT

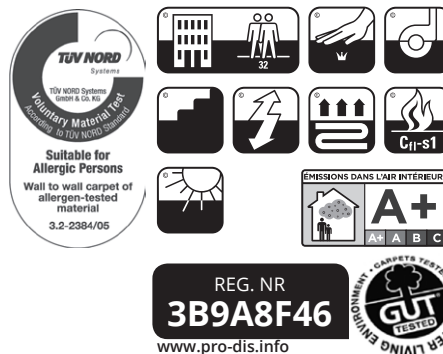

EN14041

13

Balta Industries - Kanegem-
straat 15 - BE 8700 Tielt


DOP: 1011 #IE0ACV

Textile Floor Covering EN1307
Notified body 2401


CE mark and various certification logos (DOP, NA, HCHO, etc.)

apollo


SDE new AB



▲ 95




▲ 97



▲ 198




▲ 47



▲ 37



▲ 33



▲ 24




▲ 78



▲ 48



▲ 11



▲ 66



▲ 76