

MIPOLAM BIOCONTROL

Cleanroom Flooring

industrybygerflor.com



Gerflor[®]
theflooringroup



- **Certified for use in ISO-3 cleanrooms**

- *Certifié pour un usage en salles propres ISO-3*
- Zertifiziert für ISO-3 Reinräume



- **Extreme Resistance to Chemicals**

- *Excellente résistance aux agressions chimiques*
- Sehr hohe chemische Beständigkeit



- **Certified for use in GMP Class A cleanrooms**

- *Certifié pour un usage en salles propres BPF-Classe A*
- Zertifiziert für GMP-Klasse A Reinräume



- **Resistance to Heavy Traffic**

- *Résistance aux charges lourdes*
- Fahrdynamisch hochbelastbar



MIPOLAM
BIOCONTROL
PERFORMANCE

MIPOLAM
BIOCONTROL

DESCRIPTION

Total Thickness	-	EN 428	mm	2 (0.08")	2 (0.08")
Roll Width / Length	-	EN 426	m	2 x 20 (6'6" x 66')	2 x 20 (6'6" x 66')
Tile Format*	-	EN 727	mm	608 x 608 (23.9" x 23.9")	608 x 608 (23.9" x 23.9")

CLASSIFICATION

Fire Rating	-	EN 13501-1	class	B _{f1} -s1	B _{f1} -s1
Fire Rating	-	ASTM E 648	class	Class 1	Class 1
Slip Resistance	-	DIN 51130	class	R9	R9
Coefficient of Friction	-	ASTM D 2047	-	0.56 (exceeds)	0.56 (exceeds)
Coefficient of Friction	-	ASTM C 1028	-	Meets Requirements	Meets Requirements
European Classification	-	EN 649/ EN 685	class	34 - 43	34 - 43
Reference Specification	-	ASTM F1913	-	Meets Requirements	Meets Requirements
Reference Specification	-	EN 14041	-	Meets Requirements	Meets Requirements
Maximum Static Load Limit	-	ASTM F970	-	- .002" under 250 psi Up to 2000 psi	- .002" under 250 psi Up to 2000 psi

PERFORMANCE

Particulate Emission	Fraunhofer Method	ISO 14644-1	-	ISO 3	ISO 4
Air Chemical Cleanliness	ISO 16000-6/-9/-11	ISO 14644-8	µg/m ³ /hr	TVOC = Unmeasurable (at 23°C) ACCM/AMCm ≤9.6	TVOC = 4.7 (at 23°C)
Anion Emission	Fraunhofer Method	ISO 14644-8	µg/m ³ /hr	Unmeasurable (at 23°C)	155 (at 23°C)
Ammonium N Emission	ISO 11732	ISO 14644-8	µg/m ³ /hr	Unmeasurable (at 23°C)	Unmeasurable (at 23°C)
Static Electrical Propensity	EN 61340-4-5	EN 61340-5-1	kV	Antistatic <2	Antistatic <2
Electrical Resistance	EN 61340-4-1	EN 61340-5-1	Ω	Insulating >10 ¹¹	Insulating >10 ¹¹
Particulate Cleanability	Fraunhofer Method	VDI 2083 part 9.1 ISO14644-9	%	98.66% reduction in particulate contamination	85.66% reduction in particulate contamination
Biological Cleanability	Fraunhofer Method	ISO14698-1/GMP	classification	A-B	A-C
Action of micro-organism on the flooring	ISO 846	GMP	classification	Inert and resistant	Inert and resistant
Development of micro-organism on the flooring	ISO 846	ISO14698-1/GMP	classification	Bacteriostatic	Bacteriostatic
Chemical Resistance	ISO 2812-1	ISO14644-4/GMP	-	Excellent	Very Good
Resistance to gaseous H ₂ O ₂ (HPV)	BIOQUELL Method	ISO14644-4/GMP	-	No damage	No damage


* Tiles available for a minimum order quantity of 500m²

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.
Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.




Environmental Profiles Scheme
Certificate Number ENP 359
BRE 'A' Rated Green Guide Product

MIPOLAM BIOCONTROL PERFORMANCE




BP-6027 ACACIA

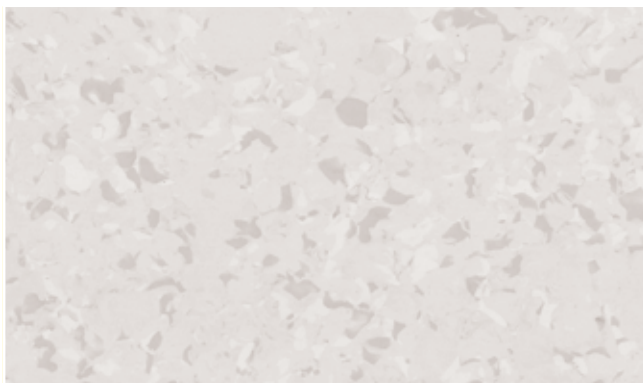


BP-6008 CALICO



BP-6006 BLUE SKY

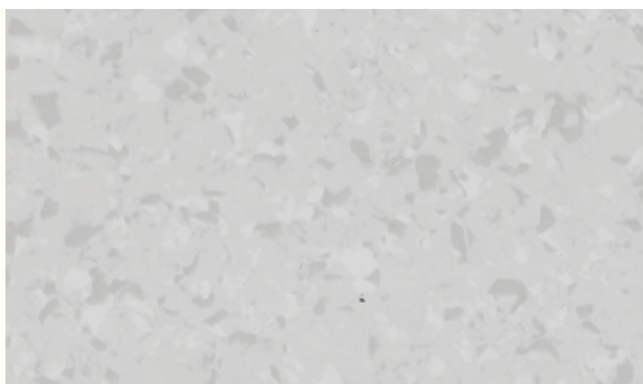

BP-6009 GREY STONE

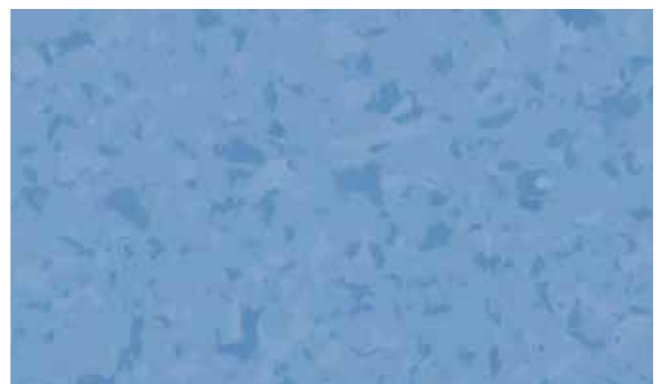

BP-6016 SEA BLUE



BP-6029 CLOUD




BP-6044 SEA STORM



Recommended for heavy traffic areas / *Recommandé pour zones de trafic intense* /
Für Bereiche mit höchster Beanspruchung

BP = Mipolam Biocontrol Performance
B = Mipolam Biocontrol



 100%
recyclable



BP-6031 BREEZE




BP-6001 COTTON



BP-6041 CLAY



BP-6032 SUNSHINE

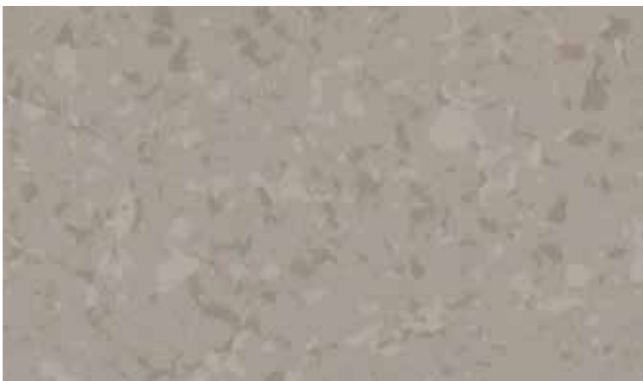

BP-6039 PEBBLE



BP-6035 SUNSET



BP-6043 WOOD




BP-6055 TOMATO

MIPOLAM BIOCONTROL


ISO4

GMP-Class A


✓ H₂O₂

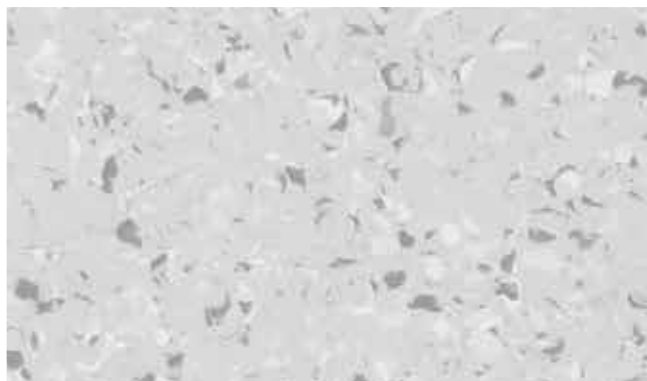


B-5312 WHITE PEPPER

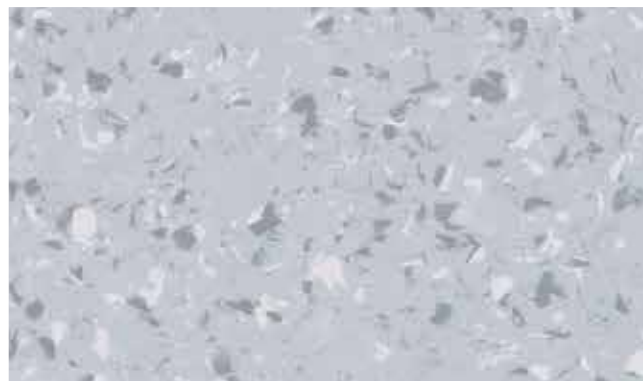


B-5310 MIXDIM

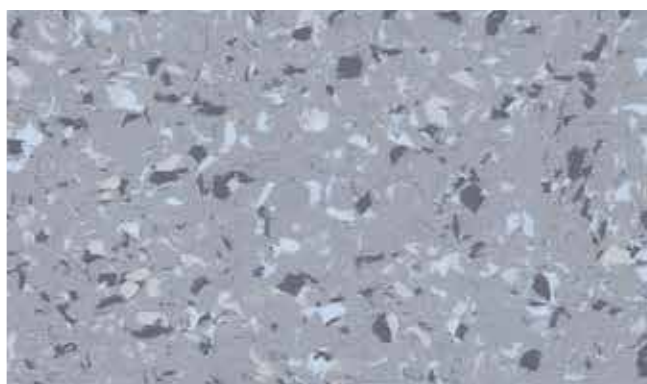


B-5320 MIXGREY

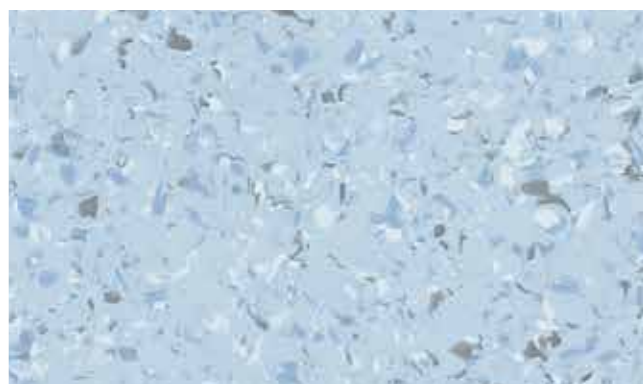


B-5306 MIXBLUE

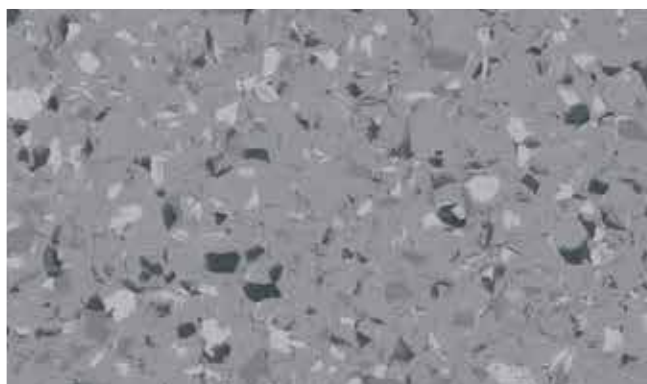


B-5330 SMOKE

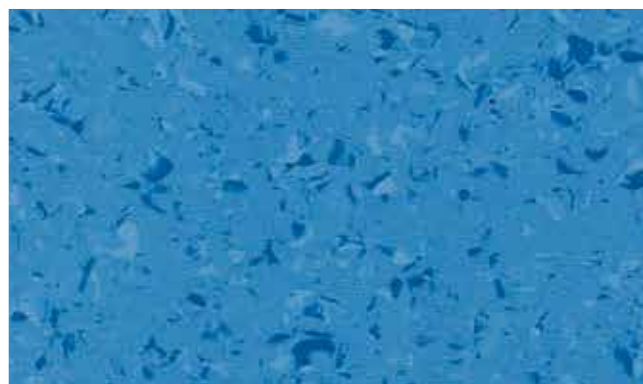

B-5366 IRIS

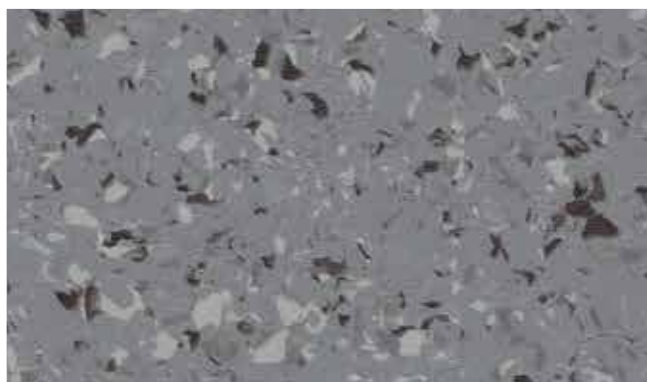

B-5350 SLATE

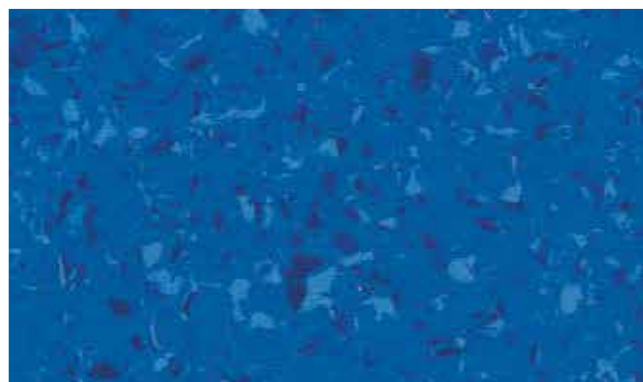

B-5356 INDIGO



Recommended for heavy traffic areas / *Recommandé pour zones de trafic intense* /
Für Bereiche mit höchster Beanspruchung

BP = Mipolam Biocontrol Performance
B = Mipolam Biocontrol



B-5305 GARLIC




B-5303 MIXBEIGE




B-5341 PEANUT



B-5332 TURMERIC

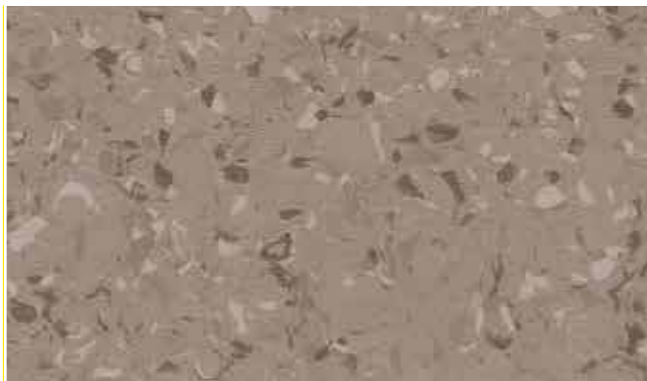

B-5363 CINNAMON

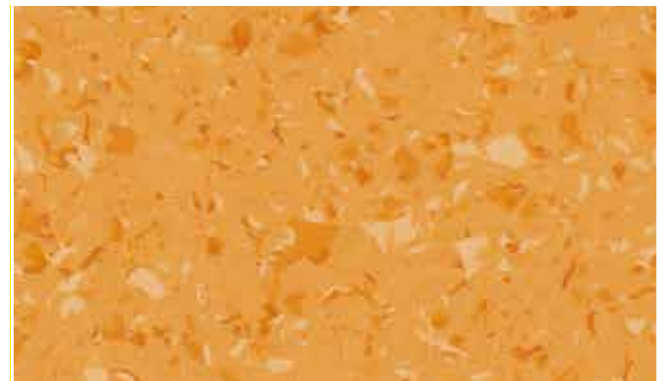

B-5385 SAFRAN



B-5357 CHERVIL



B-5375 PAPRIKA

ASIA: Gerflor Asia
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorasiasia@gerflor.com
AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119
e-mail: gerflor@gerflor.com.au
AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)7229/70800-0 - Fax: +43 (0)7229/70800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com
BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com
CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com
CHINA: Gerflor Floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com
FINLAND: Gerflor Oy
Tel: +358 (0) 10 617 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi
FRANCE: Gerflor - Service Express:

► N°Azur 0 810 569 569 ► N°Azur FAX 0 810 569 570
PRIX APPEL LOCAL PRIX APPEL LOCAL

e-mail: contactfrance@gerflor.com
GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0) 22 41-25 30-0 - e-mail: GerflorMipolam@Gerflor.com
Kunden-Service: kundenservice@gerflor.com
Tel: +49 (0) 22 41-25 30-136 - Fax: +49 (0) 22 41-25 30-100
SAT Service und Anwendungstechnik: Technik@Gerflor.com
Tel: +49 (0) 22 41-25 30-555 - Fax: +49 (0) 22 41-25 30-550
IRELAND: Gerflor Ltd
Tel: +353 (0) 42 96 61431 - Fax: +353 (0) 42 96 61759
e-mail: gerflorirl@gerflor.com
ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com
LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23
e-mail: gerflor@gerflor.com.br
MIDDLE EAST: Gerflor Middle East
Tel: +966 13 847 1779 - Fax: +966 13 847 1781
Email: info@gerflorme.com
NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com
OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com
POLAND: Gerflor Polska Sp z o.o
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl
PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com
RUSSIA: Gerflor zao
Tel / Fax: +7 495 785-23-71
e-mail: gerflorussia@gerflor.ru
SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no
SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com
UNITED KINGDOM: Gerflor Ltd
Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647
e-mail: contractuk@gerflor.com
USA: Gerflor North America
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com

industrybygerflor.com
industry@gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Be CONNECTED!



Follow us on LinkedIn



industrybygerflor.com



Committed to sustainable development

Gerflor[®]
theflooringgroup