
TIMBERLINE

PHOTOBOOK





TIMBERLINE



All references available
in Compact sheet



100% recyclable



Polyurethane surface
treatment:

- Easy maintenance
- Resistance to chemicals
- Significantly delays wax
application



Anti slip R10



Welding rods:
please refer to
www.gerflor.com

TIMBERLINE

| AURORE



0137 Aurore Natural
NCS: 3020-Y40R / LRV: 39,7



TIMBERLINE

| MAPLE



0422 Maple Light

NCS: 3020-Y30R / LRV: 40,8

CABANA OAK



0492 Cabana Oak Brown
NCS: 5020-Y30R / LRV: 25,4



TIMBERLINE

| TORONTO



0449 Toronto Miel
NCS: 3020-Y30R / LRV: 35,1



OAK



0847 Oak Light
NCS: 4020-Y30R / LRV: 33,9



TIMBERLINE

| OAK SELECT



No strip
Continuous
design



0452 Oak Select Medium
NCS: 4020-Y30R / LRV: 31,2



0502 Oak Select Grey
NCS: 4005-Y50R / LRV: 30,6

| CHENE



0669 Chene Light
NCS: 3010-Y30R / LRV: 39,1



TIMBERLINE

| NOMA



0476 Noma Miel
NCS: 4010-Y30R / LRV: 31,8



1451 Noma Kola
NCS: 3005-Y20R / LRV: 41,8



HARBOR



Variable
widths
& lengths



1893 Harbor Blue
NCS: 4005-Y20R / LRV: 35,5



1900 Harbor Nature
NCS: 3005-Y20R / LRV: 49,0



TIMBERLINE

| WHITEWASHED OAK



0542 Whitewashed Oak Warm Grey
NCS: 6010-Y50R / LRV: 19,2

| WALNUT



0562 Walnut Grey Brown
NCS: 5010-Y50R / LRV: 20,0



TIMBERLINE

| SHERWOOD



2015 Sherwood Brown
NCS: 5020-Y30R / LRV: 18,7



2017 Sherwood Grey
NCS: 5005-Y20R / LRV: 27,4



2012 Sherwood Clear
NCS: 3010-Y30R / LRV: 38,1

TIMBER



1751 Timber Grey
NCS: 4502-Y / LRV: 33,5



TIMBERLINE

| COGNAC




2006 Cognac Pearl
NCS: 5005-Y20R / LRV: 30,1



2007 Cognac Blond
NCS: 3010-Y30R / LRV: 40,6

| RUSTIC PINE

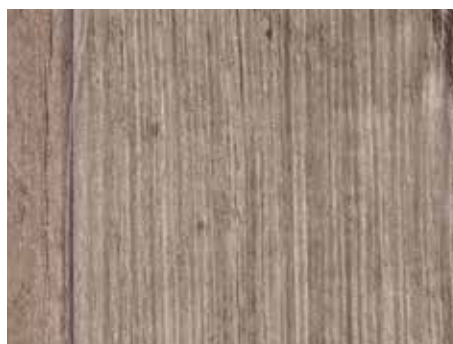

0432 Rustic Pine Warm Grey
NCS: 5005-Y50R / LRV: 26,9



TIMBERLINE

| FACTORY



1518 Factory White

NCS: 3005-Y20R / LRV: 46,2

| BRUGES



Variable
widths
& lengths



2010 Bruges Naturel
NCS: 4020-Y20R / LRV: 30,7



1971 Bruges Clear
NCS: 3005-Y20R / LRV: 50,3



TIMBERLINE

| PIXEL



2175 Pixel Clear
NCS: 2502-Y / LRV: 50,5



2176 Pixel Taupe
NCS: 4005-Y20R / LRV: 32,3



0639 Pixel Sand
NCS: 3010-Y30R / LRV: 46,6



2183 Pixel Earth
NCS: 5010-Y30R / LRV: 23,5



0597 Pixel Silver
NCS: 3502-R / LRV: 40,4




0621 Pixel Vanilla
NCS: 2030-Y10R / LRV: 44,2




0632 Pixel Anthracite
NCS: 5502-R / LRV: 23,5




2178 Pixel Paprika
NCS: 3050-Y40R / LRV: 23,8

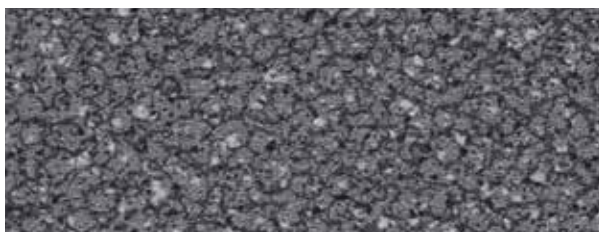


2179 Pixel Black
NCS: 7500-N / LRV: 14,3

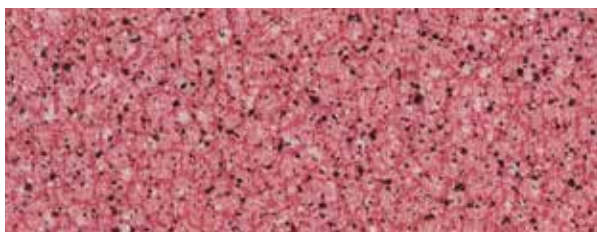


2188 Pixel Raspberry
NCS: 3040-R / LRV: 20,3

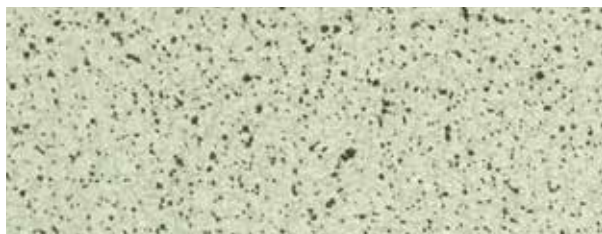


2180 Pixel Light Green
NCS: 2010-G60Y / LRV: 47,2

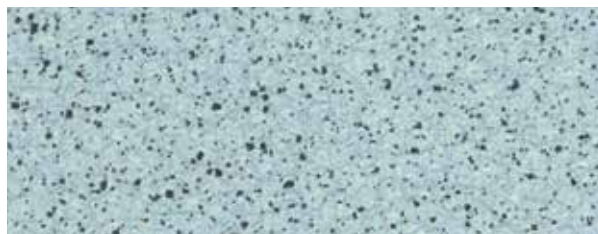

2177 Pixel Sky
NCS: 2020-B10G / LRV: 41,5

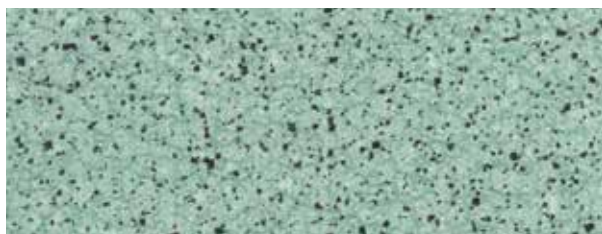

2181 Pixel Meadow
NCS: 3020-G / LRV: 34,0

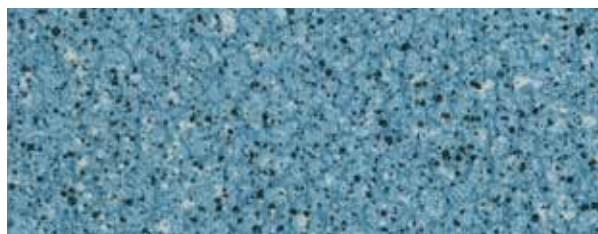

2182 Pixel Ocean
NCS: 4030-B / LRV: 22,9



DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00
Wearlayer thickness	EN ISO 24340 [EN 429]	mm	0.70
Weight	EN ISO 23997 [EN 430]	g/sq.m	2560
Width/length of sheet	EN ISO 24341 [EN 426]	cm/lm	200 / 20 - 400 / 20

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]
European classification	EN ISO 10874 [EN 685]	class	34-43
Fire rating	EN 13501-1	class	Bfl - s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance ⁽¹⁾	DIN 51130	class	R10

PERFORMANCE

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	NF 189	group	T
Type binder content	ISO 10582	type	I
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 [EN 433]	mm	≤ 0.10
Residual indentation (measure)	-	mm	≈ 0.05
Impact sound insulation	EN ISO 717-2	dB	≈ 6
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK
Thermal conductivity	EN ISO 10456 [EN12524]	W/(m.K)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance ⁽²⁾	EN ISO 26987 [EN 423]	-	OK

ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
--------------------	-------------	-------------------	-------

CE marking

CE	EN 14041	-	  
		-	

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges.

(2) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

Product description and technical data sheet available in various languages.
See our Gerflor websites.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.



Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/01/2019 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

Plank sizes

DESIGN	PATTERN REPEAT IN MM	LENGTH CM	WIDTH CM
Aurore	1333 x 1000	50 - 33,3 - 25	7,5
Bruges	1000 x 1000	1000	15 - 17,5 - 10 - 18,5 - 10,5 - 16 - 12,5
Cabana OAK	1000 x 1000	100	16
Chene	1000 x 1000	35 - 31,5 - 33,5	6,2
Cognac	1333 x 1000	133,3	20
Factory	1000 x 1000	100	16,6
Harbor	1333 x 1000	41,6 - 91,4	11
	1333 x 1000	77,5 - 55,5	6
	1333 x 1000	68 - 65	10
	1333 x 1000	63 - 70	8
	1333 x 1000	44 - 89	5
	1333 x 1000	59 - 74	14,5
	1333 x 1000	68,5 - 64,5	10
	1333 x 1000	48 - 85	11,8
	1333 x 1000	69,5 - 63,5	6,2
	1333 x 1000	40,5 - 92,5	4,5
	1333 x 1000	61 - 72	7
	1333 x 1000	35,5 - 97,5	9
	1333 x 1000	61,5 - 30,8 - 41 - 71,6	7
Maple	1333 x 1000	61,5 - 30,8 - 41 - 71,6	7
Noma	1000 x 1000	100	16,6
OAK	1000 x 1000	35 - 31,5 - 33,5	6,2
OAK Select	1000 x 1000	no plank	no plank
Rustic Pine	1333 x 1000	133	10
Sherwood	1333 x 1000	133,3	25
Timber	1000 x 1000	100	16
Toronto	1333 x 1000	133,3	16,8
Walnut	1000 x 1000	100	10
Whitewashed OAK	1000 x 1000	100	16,6



Gerflor International

Tel: +33 (0)4 74 05 40 00

Fax: +33 (0)4 74 05 03 13

e-mail: gerflorcontract@gerflor.com

gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

Gerflor Don't forget our complementary ranges!



Handrails



Wall Coverings
& Protections



Entrance mats



Skirtings
& Profiles

Gerflor

Be connected!



www.gerflor.com

#Gerflor

TIMBERLINE, **ACTIONS SPEAK LOUDER THAN WORDS**



COMPOSITION

100% REACH



RECYCLABILITY

100%



**INDOOR
AIR QUALITY**

10 times lower than
norm requirements
(TVOC < 100 µg/m³ after 28 days)



LCA

Eco-designed according
to a product-specific
life cycle analysis



WELLNESS

Anti slip R10

Gerflor
theflooringroup