





“myReference,”

RIGID

30

LOCK

Gerflor[®]
theflooringroup



RIGID


30

LOCK

178 x 1219 mm

228 x 1492 mm

457 x 914 mm



PUR+ MATT

Easy maintenance

4D DESIGN

MATT SURFACE

Natural look

CRISTAL WEAR LAYER

High definition design & color

STRUCTURED EMBOSS & BEVEL

Ultra realistic surface

XL FORMAT

Wide variety of tiles & planks

FULL RIGID CORE TECHNOLOGY

Rigid

60 °C
140 °F
Max.

The best stability

Renovation ceramic
6 mm joint

LOCK SYSTEM

Standard laminate installation

RIGID	30
	LOCK

178 x 1219 mm





228 x 1492 mm



457 x 914 mm



XL
PLANKS



PUNO PURE



PUNO BROWN



KILDA GOLDEN



KILDA PEARL

XL
TILES



TRONDHEIM



BELLO



KILDA PEARL



KILDA PEARL - 0019

228 x 1492 mm



KILDA GOLDEN - 0015

228 x 1492 mm



KILDA GOLDEN



PUNO PURE - 0017

228 x 1492 mm



PUNO PURE



PUNO BROWN



PUNO BROWN - 0016

228 x 1492 mm



TRONDHEIM - 0011

457 x 914 mm



BELLO - 0013

457 x 914 mm



BELLO



TRONDHEIM



PUERTO - 0001

178 x 1219 mm



CRUNCHY - 0979

178 x 1219 mm



VIAJO - 0003

178 x 1219 mm



SUCRE - 0004

178 x 1219 mm




HOBART - 0002

178 x 1219 mm



HOBART

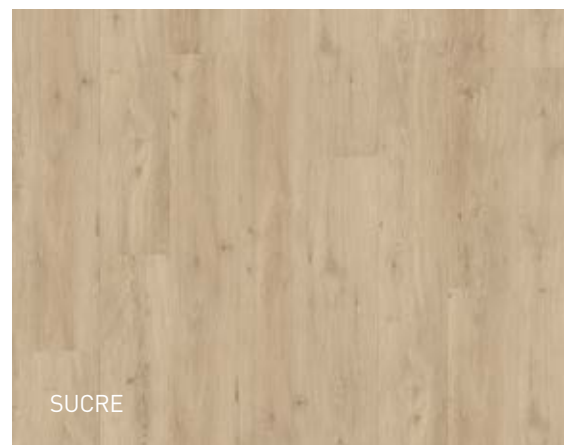

SUCRE



CRUNCHY



PUERTO



VIAJO

RIGID 30 LOCK
RUSTIC WOOD PLANK



QUITO - 0007

178 x 1219 mm



LOVINA - 0008

178 x 1219 mm



CARTAGO - 0010

178 x 1219 mm



VIAJO GREY - 0009

178 x 1219 mm




SUAVE GREY - 0977

178 x 1219 mm



QUITO

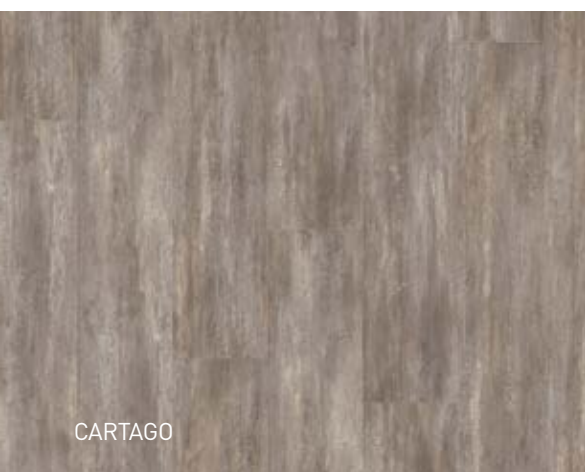

CARTAGO



SUAVE GREY





LOVINA



VIAJO GREY



RIGID 30 LOCK A FULL SET OF FINISHES

DESIGN SKIRTINGS



Vinyl design skirting
Ref. 6086

- Up to 80sqm room only




MDF design skirting
Ref. 5947




Also available in white
can be painted over

OTHER SKIRTINGS

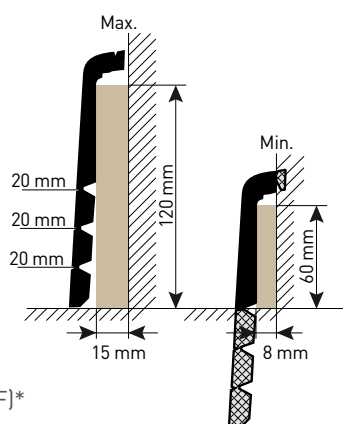


Cover skirting (MDF)*
Ref. 2550

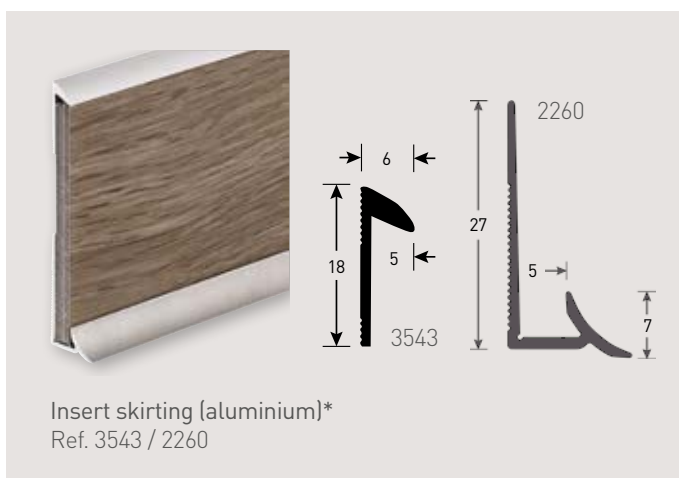


Insert skirting (aluminium)*
Ref. 3543 / 2260

STAIRNOSING SOLUTION

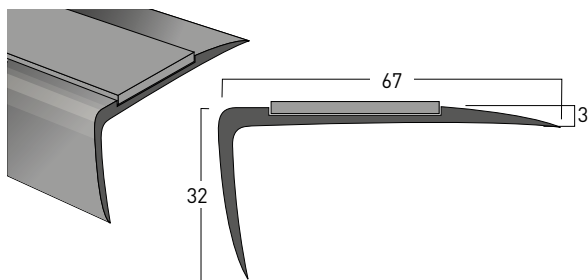


Nosing T67 (aluminium)
Ref. 0503

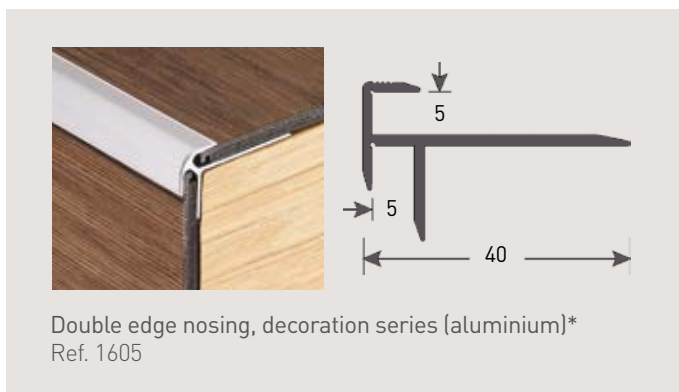

Double edge nosing, decoration series (aluminium)*
Ref. 1605

I PROFILES

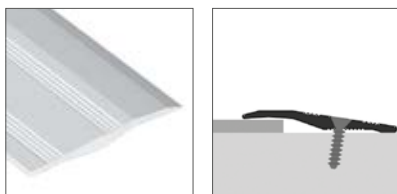


Ramp 2,5-5mm (aluminium)
Ref. 2655



I ENTRANCE MATS



Looselay Romat GT insert kit
Ref. 1719

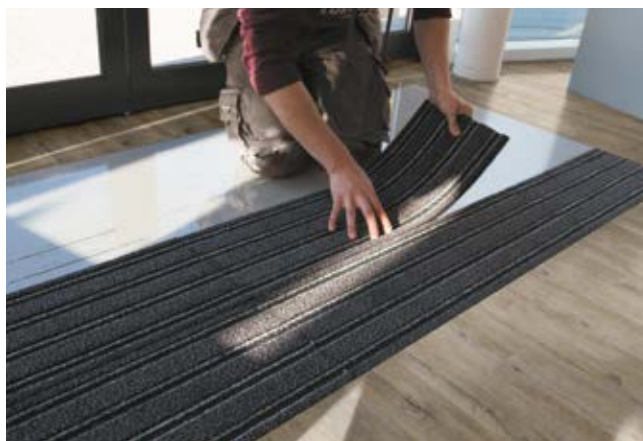

Quick mat*
Ref. 8550

I FLOOR PROTECTION



Floor protection
Ref. 058X

*Please contact Romus www.romusworld.com or Gradus www.gradusworld.com.
Romus and Gradus are part of Gerflor group.


FOR MORE DETAILS
visit gerflor.com



LVT finishes brochure

RIGID 30 LOCK

EQUIVALENCE RIGID 30 LOCK & CREATION 30

	RIGID 30 LOCK	CREATION 30 GLUE DOWN / CLIC
	CARTAGO - 0010	AMADOR - 0447
	HOBART - 0002	BALLERINA - 0347
	KILDA PEARL - 0019	SWISS OAK PEARL - 0846
	KILDA GOLDEN - 0015	SWISS OAK GOLDEN - 0796
	VIAJO - 0003	BOSTONIAN OAK - 0871
	VIAJO GREY - 0009	BOSTONIAN OAK GREY - 0855
	PUNO BROWN - 0016	CEDAR BROWN - 0850
	PUNO PURE - 0017	CEDAR PURE - 0849
	BELLO - 0013	CARMEL - 0618
	QUITO - 0007	ARENA - 0060
	SUCRE - 0004	TWIST - 0504
	TRONDHEIM - 0011	NORVEGIAN STONE - 0860
	LOVINA - 0008	RANCH - 0456
	PUERTO - 0001	QUARTET - 0503
	SUAVE GREY - 0977	OXFORD - 0061
	CRUNCHY - 0979	BUFFALO - 0457

INSTALLATION



LOCK SYSTEM



CUTTING WITH A SAW

UNDERLAYERS



UNDERLAY
GERFLOR ACOUSTIC / 15 dB



UNDERLAY
GERFLOR SILENCE PLUS / 19 dB

More details on gerflor.com

RIGID 30 LOCK

TECHNICAL DATA

RIGID 30 LOCK

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Espessura total / Spessore totale	EN ISO 24346 [EN 428]	mm	4.00		
Thickness of the wearlayer / Dicke der Nutzschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura	EN ISO 24340 [EN 429]	mm	0.30		
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997 [EN 430]	g/m²	7890		
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensione	ISO 24342 [EN 427]	mm	178x1219	228x1492	457x914
Number of planks /tiles and sqm per box	-	-	7 / 1.52 m²	5 / 1.70 m²	5 / 2.09 m²

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/ Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582		
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874 [EN 685]	Class	23 - 31		
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1		
Static Electrical Propensity / Begehaufadung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica	EN 1815	kV	< 2		
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida	DIN 51130	Class	R10 ⁽¹⁾		

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm³	≤ 2.0		
Wear Group / Verschleißgruppe / Groep slijtvasheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	NF 189	group	T		
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante	EN ISO 10582	type	I		
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NF S 31074	dB	80		
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	4		
Dimensional Stability (norm) / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale	EN ISO 23999 [EN 434]	%	≤ 0.15		
Dimensional Stability (average measured value) / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale	-	-	≤ 0.08		
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1 [EN 433]	mm	≤ 0.10		
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed [Type W]	ISO 4918 [EN 425]	-	OK		
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Värmemotstånd	EN ISO 10456 [EN12524]	W/(m.K)	0.25		
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	≥ 6		
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandeling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie	-	-	PUR+ Matt		
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici ⁽²⁾	EN ISO 26987 [EN 423]	-	OK		

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m³	< 100		
--	-------------	-------	-------	--	--

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

CE	EN 14041	-	   
----	----------	---	---

(1) Glissance humide / Slip resistance wet / Rutschhemmung : details sur site gerflor.com / details on website gerflor.com / Einzelheiten auf der web-site gerflor.com

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

Gerflor International
Tel: +33 (0)4 74 05 40 00
Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

ROMUS

ZA Les Pouards
13 et 15, Rue Taillefer
91160 Champlan
France
Tel : +33 (0) 1 69 79 69 77
email: welcome@romusworld.com
www.romusworld.com

Visualize your reference



interiordesigner.gerflor.com

30 years experience

Since 1985

Manufacturer


3 LVT Factories

World Class Logistics

12 Logistics Hubs

Gerflor Design Centre

Exclusive Designs



“Serenity,,
Julia - **End User**



“Time saving,,
Mika - **Installer**



“Design,,
Pierre - **Architect**



“Confidence,,
Claire - **Store Manager**



“Flexibility,,
Hans - **Distributor**

That's why Gerflor is our **Reference**