



“
myReference,,

CREATION 55

LOOSELAY

Gerflor[®]
theflooringgroup





CREATION 55

LOOSELAY

500 x 500 mm

229 x 1220 mm

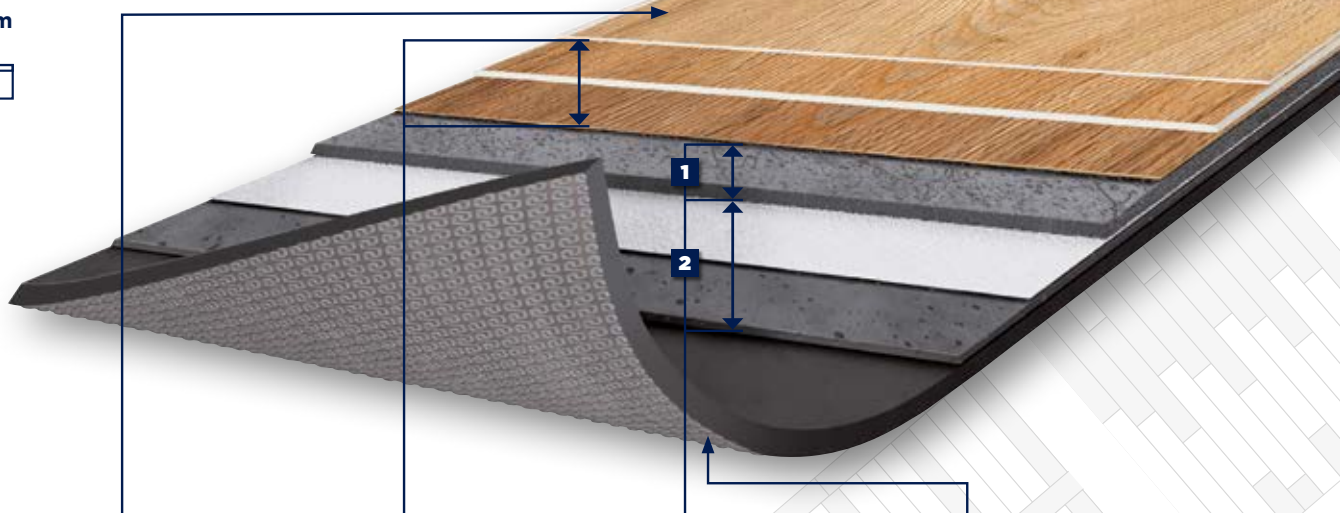

PUR+ MATT



Easy maintenance

4D DESIGN

STRUCTURED EMOSS



Ultra realistic surface

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

MIX&MATCH DESIGNS



Easy mix&match of designs & formats*

DUO CORE TECHNOLOGY

1 RESILIENT COMFORT CORE




Noise absorption



Soft underfoot

2 RIGID CORE



The best stability
Fiber glass inside



Renovation ceramic
4 mm joint



No adhesive up
to 30 m²*

GRIP-WAVE BACKLAYER

ANTI-SKID BACKING



Super strong suction
to the subfloor


Air circulation:
better acoustic

Humidity circulation:
moisture resistance



Easily removable:
renovation

CREATION 55 LOOSELAY
WOOD UNIVERSE

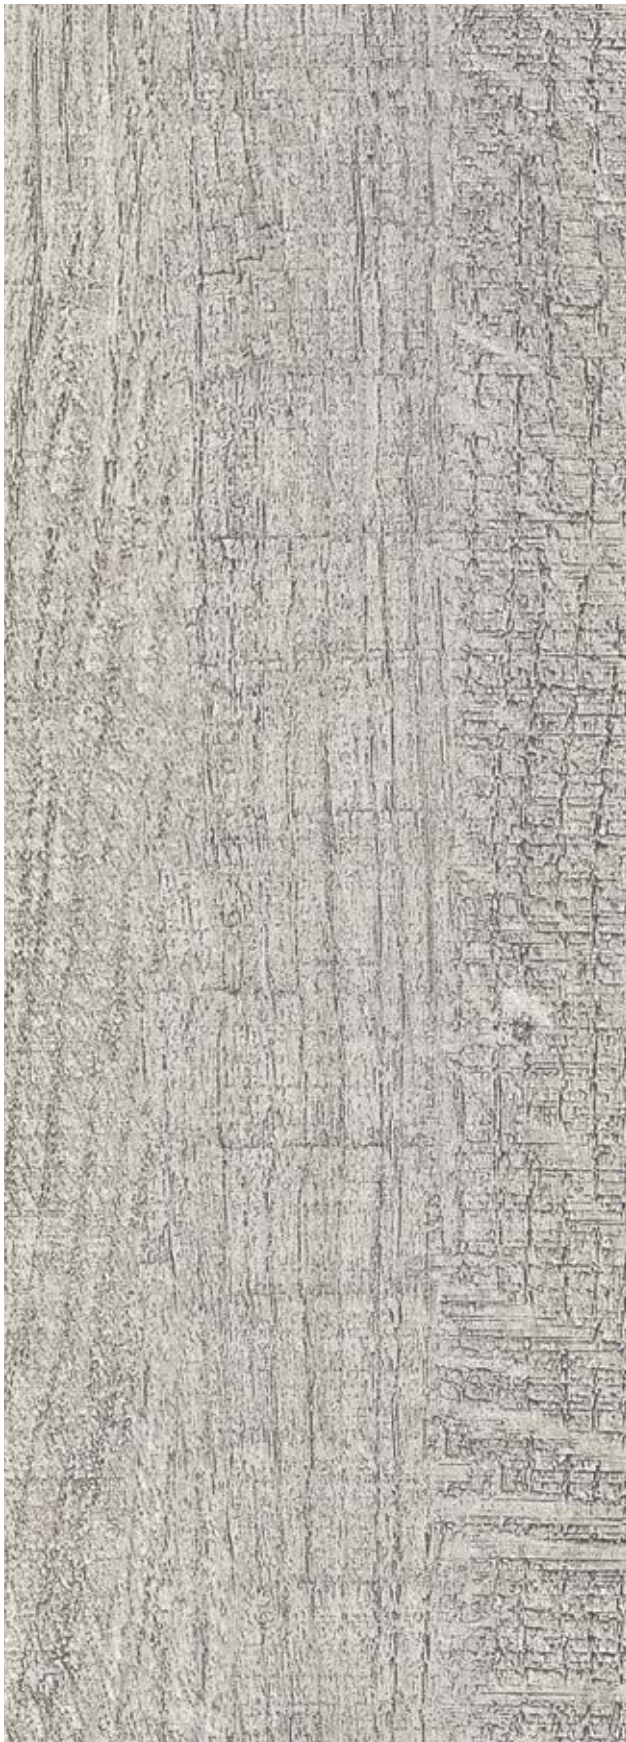

SWISS OAK PEARL - 0846
229 mm x 1220 mm



4

DESIGN SHADE VARIATION:



Light



Medium



High



SWISS OAK PEARL



SWISS OAK GOLDEN - 0796
229 mm x 1220 mm



CREATION 55 LOOSELAY
WOOD UNIVERSE



ARENA - 0060
229 mm x 1220 mm



MALUA BAY - 0448
229 mm x 1220 mm



6

DESIGN SHADE VARIATION:



Light



Medium



High



ARENA



MALUA BAY



LONG BOARD



TWIST



TWIST - 0504
229 mm x 1220 mm



LONG BOARD - 0455
229 mm x 1220 mm



CREATION 55 LOOSELAY
WOOD UNIVERSE



AMADOR - 0447
229 mm x 1220 mm



RANCH - 0456
229 mm x 1220 mm



8

DESIGN SHADE VARIATION:



Light



Medium



High



AMADOR



RANCH



HONEY OAK - 0441
229 mm x 1220 mm



BALLERINA - 0347
229 mm x 1220 mm



CREATION 55 LOOSELAY
MINERAL UNIVERSE



PARKER STATION - 0374
500 mm x 500 mm



PARKER STATION



NORVEGIAN STONE - 0860
500 mm x 500 mm



NORVEGIAN STONE






CARMEL - 0618
500 mm x 500 mm



CREATION 55 LOOSELAY
TEXTILE UNIVERSE

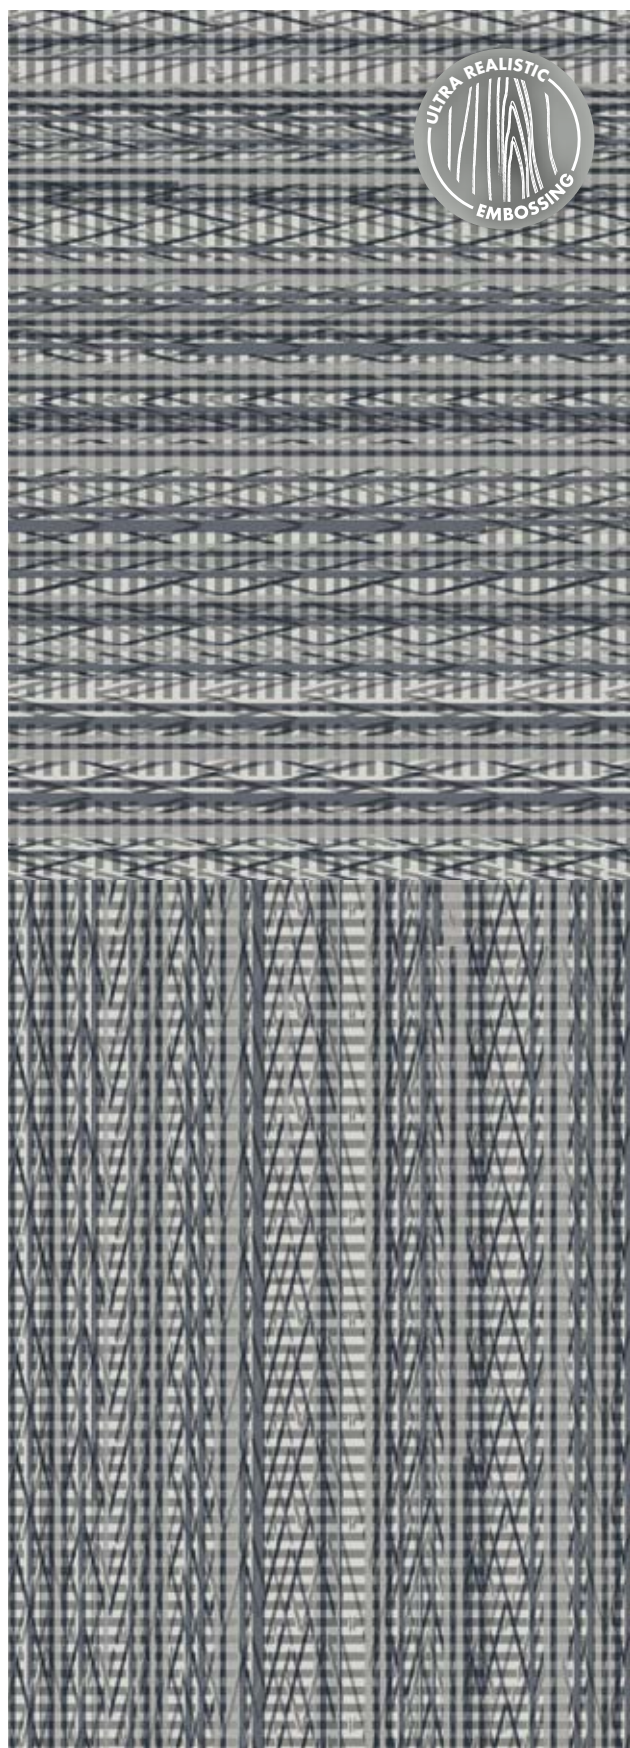

PONTO CRUZ CITY - 0878
500 mm x 500 mm



12

DESIGN SHADE VARIATION:



Light



Medium




High



PONTO CRUZ CITY




PONTO CRUZ NAVY

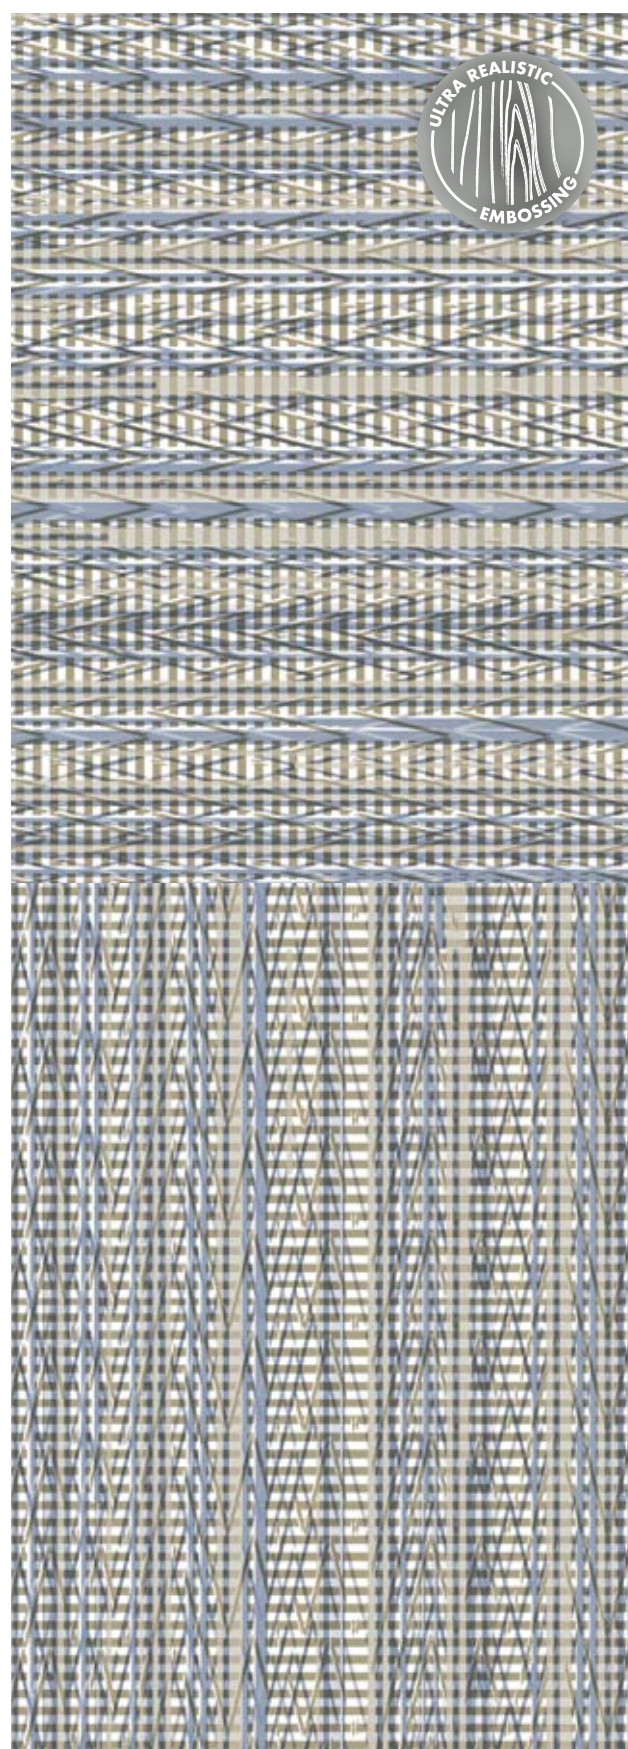


PONTO CRUZ NAVY - 0876
500 mm x 500 mm




EXPLORE THE WORLD OF POSSIBILITIES




SLIM STRIPES




FENCE




ACCORDEON

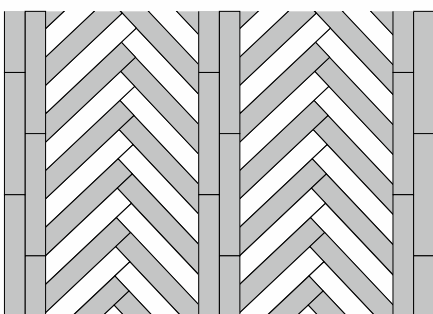


RYTHME

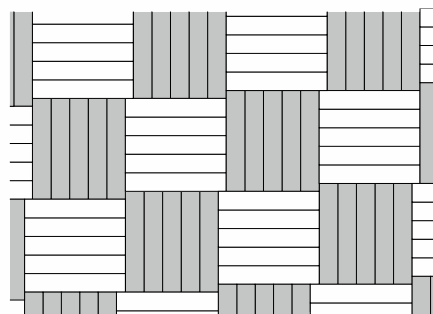


TRICOT



FAT STRIPES



PIANO



TARGET

SLIM STRIPES



QUICK & EASY TO INSTALL



INSTALLATION WITH TACKIFIER



APPLY PLANKS OR TILES



PRESSURE ROLLER



EASY TO REPAIR

INSTALLATION



OVER RAISED
ACCESS FLOOR



OVER CERAMIC
TILES



ADHESIVE FREE
UNDER 30M²

Please refer to Gerflor's installation guidelines





ACCORDEON





RYTHME





TARGET







PIANO





FAT STRIPES







TRICOT







CREATION 55 LOOSELAY A FULL SET OF FINISHES


DESIGN SKIRTINGS



Vinyl design skirting
Ref. 6086





MDF design skirting
Ref. 5947



OTHER SKIRTINGS




Cover skirting (MDF)
Ref. 2550

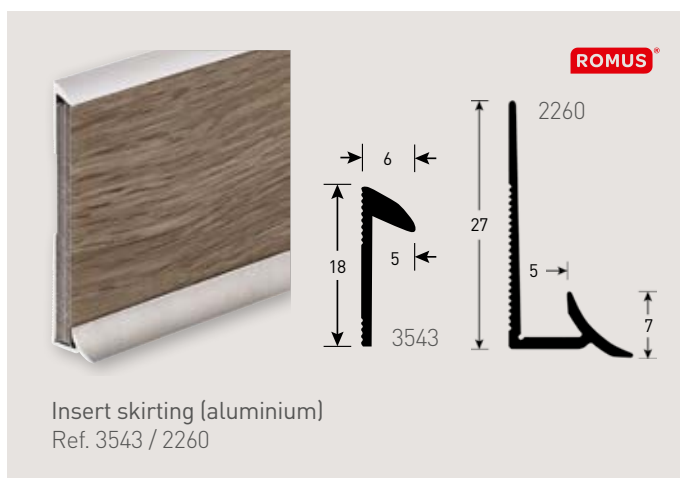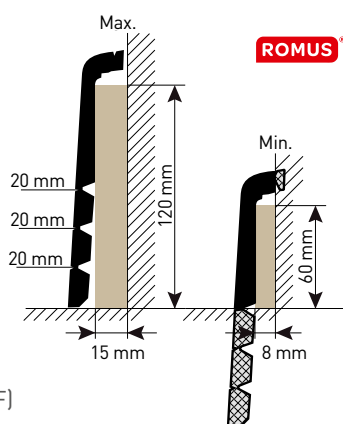


Insert skirting (aluminium)
Ref. 3543 / 2260

STAIRNOSING SOLUTION

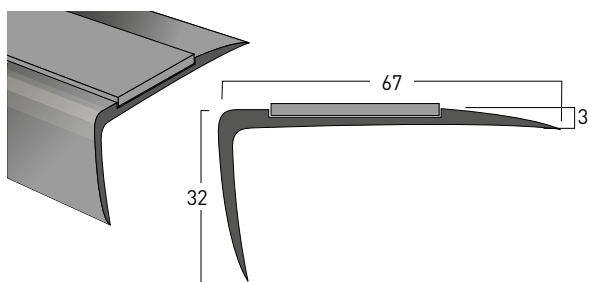


Nosing T67 (aluminium)
Ref. 0503

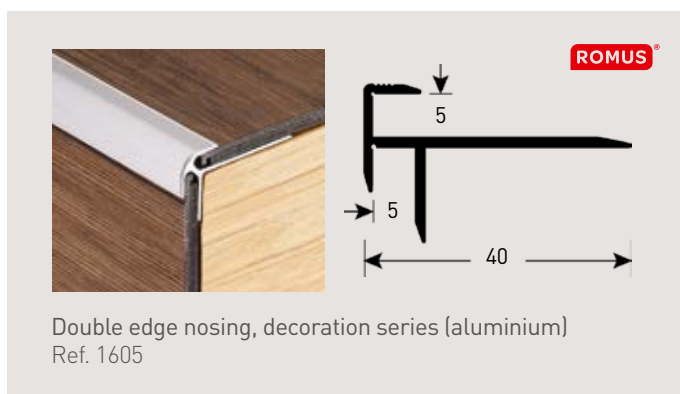


Double edge nosing, decoration series (aluminium)
Ref. 1605

PROFILES

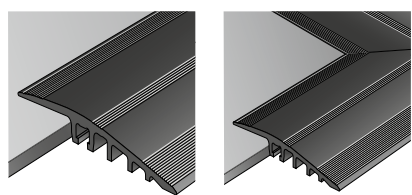

0505

1513




Ramp 5-6mm (aluminium)
Ref. 0505



ENTRANCE MATS



Looselay Romat GT insert kit
Ref. 1719

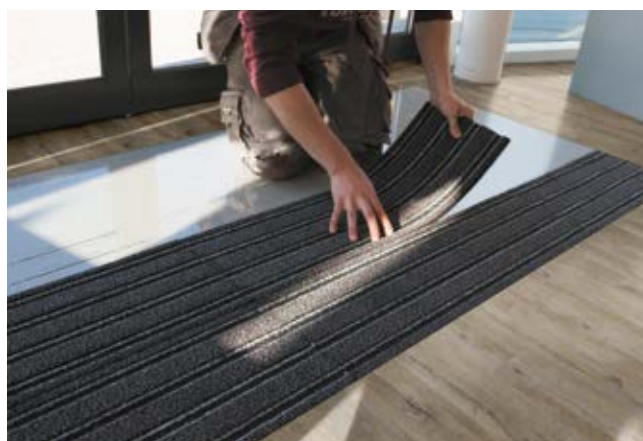

Quick mat
Ref. 8550

ROMUS

FLOOR PROTECTION



Floor protection
Ref. 058X

FOR MORE DETAILS
visit gerflor.com



FINISHING SOLUTIONS
Special LVT

Gerflor
the flooring group

LVT finishes brochure



CREATION 55 LOOSELAY

TECHNICAL DATA

CREATION 55 LOOSELAY

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Essessura total / Spessore totale	EN ISO 24346 [EN 428]	mm	4.50
	ASTM F386-02	inch	0.18
Thickness of the wearlayer / Dicke der Nuttschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Essessura camada de desgaste / Spessore strato di usura	EN ISO 24340 [EN 429]	mm	0.55
	ASTM F410-02	inch	0.02
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997 [EN 430]	g/m²	7500
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensione	ISO 24342 [EN 427]	mm	229x1220 500x500
	ASTM F 536	inch	9" x 48" 19.7" x 19.7"

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme/ Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582 [EN 649]
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874 [EN 685]	Class	33 - 42
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1
Static Electrical Propensity / Begehaufadung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica	EN 1815	kV	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida ⁽¹⁾	DIN 51130 / BGR 181	Class	R10

PERFORMANCES / TECHNISCHE EIGENSCHAFTEEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm³	≤ 2.0
Wear Group / Verschleißgruppe / Groep slijtvastheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	EN 652	group	T
Type Binder content / Bindemittelgehalt / Teneur en agent liant / Contenido en ligante / Conteúdo em ligante	ISO 10582	group	I
Dimensional Stability / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale	EN ISO 23999 [EN 434]	%	≤ 0.10
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1 [EN 433]	mm	≤ 0.10
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	7
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NF S 31074	dB	73
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed (Type W)	ISO 4918 [EN 425]	-	OK
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstånd	EN ISO 10456 [EN12524]	W/(m.K)	0.25
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	≥ 6
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandeling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie	-	-	PUR+ Matt
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische beständigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici ⁽²⁾	EN ISO 26987 [EN 423]	-	OK

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	µg/m³	< 10
--	-------------	-------	------

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

CE	EN 14041	-	   
----	----------	---	---

(1) Ramp test with oil / Schiefe Ebene / Plan incliné avec huile

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

CREATION, NO FORMALDEHYDE, BETTER INDOOR AIR QUALITY



COMPOSITION
100% REACH
Phthalate Free
(except recycled content)



**INDOOR
AIR QUALITY**
TVOC below detection level
No Formaldehyde emission



RECYCLABILITY
100%



**RECYCLED
CONTENT**
35%



WELLNESS
Walking noise: 73dB

Gerflor International
Tel: +33 (0)4 74 05 40 00
Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

ROMUS

ZA Les Pouards
13 et 15, Rue Taillefer
91160 Champlan
France
Tel : +33 (0) 1 69 79 69 77
email: welcome@romusworld.com
www.romusworld.com

Visualize your reference



interiordesigner.gerflor.com

30 years experience

Since 1985

Manufacturer

3 LVT Factories

World Class Logistics

12 Logistics Hubs

Gerflor Design Centre

Exclusive Designs



“Serenity,,

Julia - **End User**



“Time saving,,

Mika - **Installer**



“Design,,

Pierre - **Architect**



“Confidence,,

Claire - **Store Manager**



“Flexibility,,

Hans - **Distributor**

That's why Creation is our **Reference**

Gerflor[®]
theflooringgroup